

SYLVANIA Lamps

Natural™ Series PAR Family

TruWave Technology™

TruWave Technology offers the best alternative to natural light by mimicking the natural light spectrum, all while saving energy.

Benefits and Features

- Controls blue wavelengths for lower glare and reduced eye strain to improve readability and supports an improved sleep-wake cycle
- Perfect fit where clean light color rendering is needed for seeing realistic, vivid colors without sacrificing light output
- Properly saturates red to make building spaces and flesh tones accurate and vibrant, without oversaturating (which compromises energy efficiency)
- Exceptional color quality without the loss of efficacy typical of most 90+ CRI solutions
- Up to 85 LPW
- 3000K and 5000K color temperatures (4000K available in PAR20, PAR30, PAR38)
- CRI 90+
- Available beam angles: 25° and 40°

Electrical

- 120VAC
- Power factor >0.90
- Dimmable down to 10%

Rated Life

- 25,000 hours (L₇₀)

Warranty

- 5 year limited lamp warranty
- NLB Trusted Warranty Program

Ambient Operating Range

- -4°F to 113°F (-20°C to 45°C)



Wattage Comparison


PAR Lamp	Traditional Source	Traditional System Wattage	LED System Wattage	Energy Savings
PAR16	Halogen	50	6	\$121
PAR20	Halogen	50	6.5	\$119.63
PAR30	Halogen	75	10	\$181.50
PAR38	Halogen	100	13	\$211.75
PAR38	Halogen	120	15	\$291.50

Certifications and Listings

- cETLus
- RoHS
- ENERGY STAR®
- CEC Title 20

Installation

- Suitable for indoor and outdoor dry, damp and wet locations
- Not for use in totally enclosed fixtures, emergency light fixtures, or exit lights

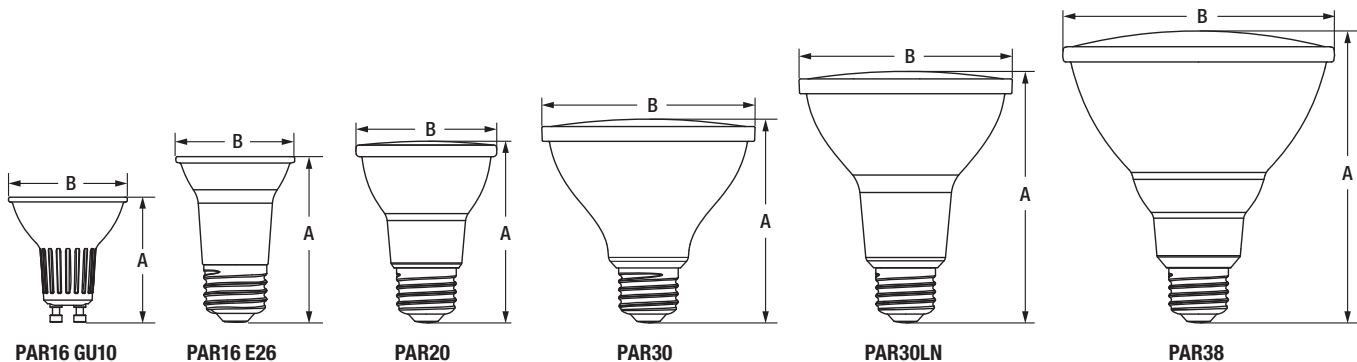

Ordering Guide

LED	XX	PARXX	XXXX	DIM	9	XX	TL	XXX	XX	GL	RP
LED	Wattage 6 = 6 Watts 6.5 = 6.5 Watts 10 = 10 Watts 13 = 13 Watts 15.5 = 15.5 Watts	Lamp Type PAR16, PAR20, PAR30, PAR30LN, PAR38	Base Blank = E26 GU10 = GU10	DIM = Dimmable	CRI 9 = 90+	Color Temperature 30 = 3000K 40 = 4000K 50 = 5000K	TL = Natural with TruWave Technology™	FL = Flood NFL = Narrow Flood	40 = 40° 25 = 25°	GL = Glass	RP = Retail Pack

Ordering Information

Item Number	Ordering Abbreviation	Power (W)	Base Type	Replaces	Input Voltage	Average Life (hrs)	Typical Lumens (lm)	CBCP	CCT	CRI
40930	LED6PAR16DIM930TLFL40GLRP 6/CS 1/SKU	6	E26	50W Halogen	120V	25,000	450	676	3000K	90+
40931	LED6PAR16DIM950TLFL40GLRP 6/CS 1/SKU	6	E26	50W Halogen	120V	25,000	450	676	5000K	90+
40932	LED6PAR16GU10DIM930TLFL40GLRP 6/CS 1/SKU	6	GU10	50W Halogen	120V	25,000	450	676	3000K	90+
40933	LED6PAR16GU10DIM950TLFL40GLRP 6/CS 1/SKU	6	GU10	50W Halogen	120V	25,000	450	676	5000K	90+
40920	LED6.5PAR20DIM930TLFL40GLRP 6/CS 1/SKU	6.5	E26	50W Halogen	120V	25,000	550	1097	3000K	90+
41119	LED6.5PAR20DIM940TLFL40GLRP 6/CS 1/SKU	6.5	E26	50W Halogen	120V	25,000	550	1097	4000K	90+
40921	LED6.5PAR20DIM950TLFL40GLRP 6/CS 1/SKU	6.5	E26	50W Halogen	120V	25,000	550	1097	5000K	90+
40914	LED10PAR30DIM930TLNFL25GLRP 6/CS 1/SKU	10	E26	75W Halogen	120V	25,000	850	1903	3000K	90+
41118	LED10PAR30DIM940TLFL40GLRP 6/CS 1/SKU	10	E26	75W Halogen	120V	25,000	850	1903	4000K	90+
40915	LED10PAR30DIM950TLNFL25GLRP 6/CS 1/SKU	10	E26	75W Halogen	120V	25,000	850	1903	5000K	90+
40916	LED10PAR30DIM930TLFL40GLRP 6/CS 1/SKU	10	E26	75W Halogen	120V	25,000	850	1903	3000K	90+
40917	LED10PAR30DIM950TLFL40GLRP 6/CS 1/SKU	10	E26	75W Halogen	120V	25,000	850	1903	5000K	90+
40910	LED10PAR30LNDIM930TLNFL25GLRP 6/CS 1/SKU	10	E26	75W Halogen	120V	25,000	850	1903	3000K	90+
40911	LED10PAR30LNDIM950TLNFL25GLRP 6/CS 1/SKU	10	E26	75W Halogen	120V	25,000	850	1903	5000K	90+
40912	LED10PAR30LNDIM930TLFL40GLRP 6/CS 1/SKU	10	E26	75W Halogen	120V	25,000	850	1903	3000K	90+
40913	LED10PAR30LNDIM950TLFL40GLRP 6/CS 1/SKU	10	E26	75W Halogen	120V	25,000	850	1903	5000K	90+
40899	LED13PAR38DIM930TLNFL25GLRP 6/CS 1/SKU	13	E26	100W Halogen	120V	25,000	1100	5681	3000K	90+
40900	LED13PAR38DIM950TLNFL25GLRP 6/CS 1/SKU	13	E26	100W Halogen	120V	25,000	1100	5681	5000K	90+
40901	LED13PAR38DIM930TLFL40GLRP 6/CS 1/SKU	13	E26	100W Halogen	120V	25,000	1100	2082	3000K	90+
41115	LED13PAR38DIM940TLFL40GLRP 6/CS 1/SKU	13	E26	100W Halogen	120V	25,000	1100	2082	4000K	90+
40902	LED13PAR38DIM950TLFL40GLRP 6/CS 1/SKU	13	E26	100W Halogen	120V	25,000	1100	2082	5000K	90+
40903	LED15.5PAR38DIM930TLNFL25GLRP 6/CS 1/SKU	15.5	E26	120W Halogen	120V	25,000	1250	6534	3000K	90+
40904	LED15.5PAR38DIM950TLNFL25GLRP 6/CS 1/SKU	15.5	E26	120W Halogen	120V	25,000	1250	6534	5000K	90+
40905	LED15.5PAR38DIM930TLFL40GLRP 6/CS 1/SKU	15.5	E26	120W Halogen	120V	25,000	1250	2390	3000K	90+
41116	LED15.5PAR38DIM940TLFL40GLRP 6/CS 1/SKU	15.5	E26	120W Halogen	120V	25,000	1250	2390	4000K	90+
40906	LED15.5PAR38DIM950TLFL40GLRP 6/CS 1/SKU	15.5	E26	120W Halogen	120V	25,000	1250	2390	5000K	90+